

01



Industry and
Corporate Affairs Canada
Commission
et Corporations Canada

(11) (A) No. 1 168 283

(45) ISSUED 840529

(52) CLASS 309-6

(51) INT. CL. H05B 3/03,3/46

(19) (CA) **CANADIAN PATENT** (12)

(54) ELECTRODE DEVICE FOR ELECTRICALLY HEATING UNDERGROUND
DEPOSITS OF HYDROCARBONS

(72) Inoue, Takeo;
Teratani, Hiroshi;
Kobayashi, Toshiyuki,
Japan

(73) Granted to Mitsubishi Denki Kabushiki Kaisha
Japan

(21) APPLICATION No. 375,295

(22) FILED 810413

(30) PRIORITY DATE Japan (51153/80) 800414
Japan (51173/80) 800414
Japan (51174/80) 800414

NO. OF CLAIMS 11

Canada

DEPOSITED BY THE PATENT OFFICE, OTTAWA
(51153/80)

1168283

FIG. 1 (PRIOR ART)

3-1


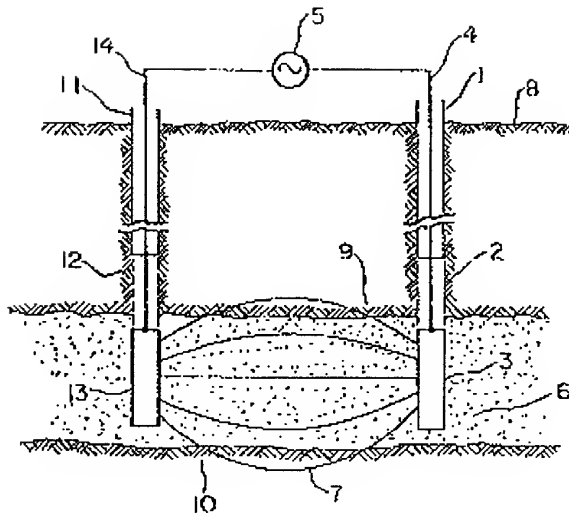


FIG. 2

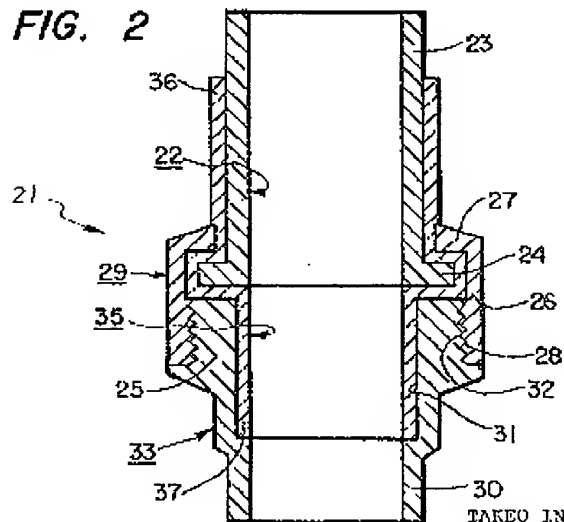

TAKEO INOUE
HIROSHI TERATANI
TOSHIYUKI KOBAYASHI
Inventors

Richard M. Langford & Hubert
Attorney

1168283

3-2

FIG. 3

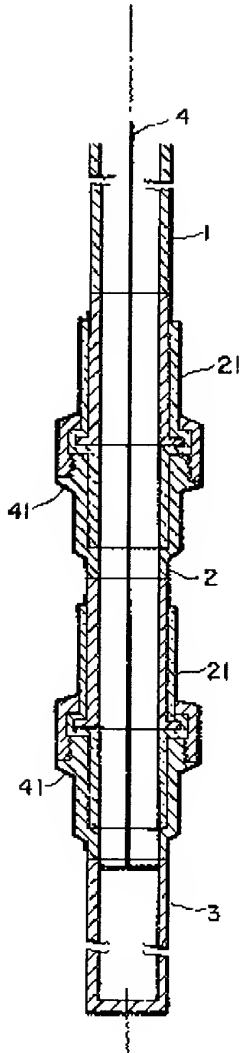


FIG. 4


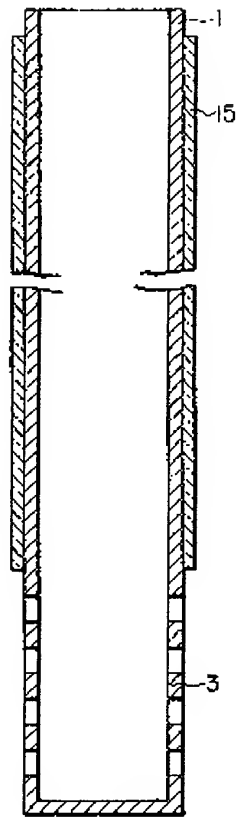


FIG. 5

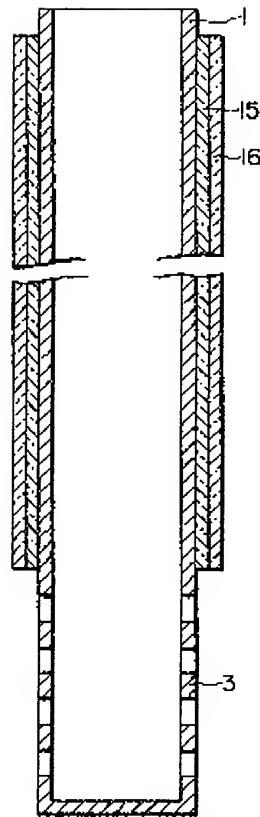

TAKESU INOUE
HIROSHI TERATANI
TOSHIYUKI KOBAYASHI

Inventors

Richard M. Hays & Harbort
Attorney

1168283

3-3

FIG. 6


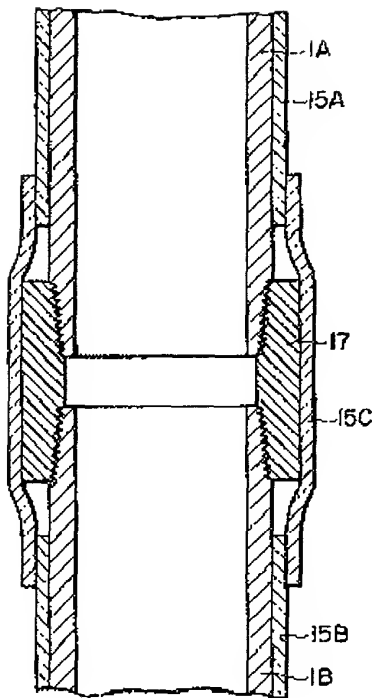


FIG. 7

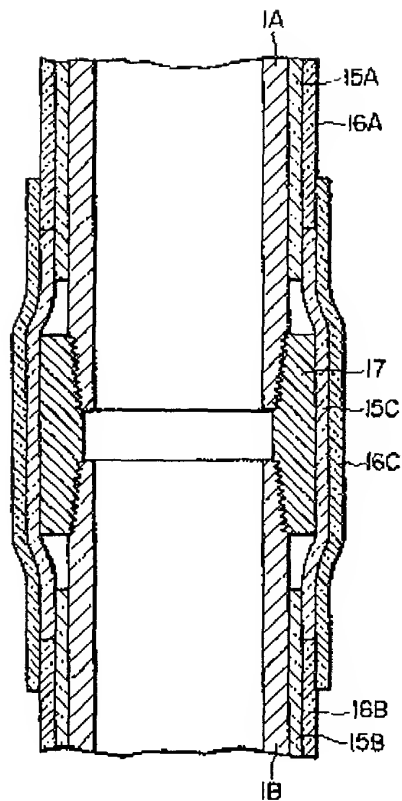

TAKEO INOUE
HIROSHI TERATANI
TOSHIYUKI KODAYASHI
Inventors

Richard M. Hughes & Associates
Attorney

ABSTRACT OF THE DISCLOSURE

An electrode device for electrically heating underground deposits of hydrocarbons such as oil sand or oil shale. Plural well pipe sections are joined through insulated pipe joints with an electrode connected through one of the insulated pipe joints to a lower one of the pipe sections. Each of the insulated pipe joints includes a first tubular member having a flange portion at one end thereof, a second tubular member having a cap portion at one end which is received in the flange portion of the first tubular member with a gap therebetween, and an insulating member disposed in the gap for hermetically coupling the first and second tubular members and for electrically insulating first and second tubular members from one another.

1168283

ELECTRODE DEVICE FOR ELECTRICALLY HEATING
UNDERGROUND DEPOSITS OF HYDROCARBONS

BACKGROUND OF THE INVENTION

The present invention relates to an electric device used to electrically heat underground deposits of hydrocarbons. More specifically, the present invention relates to an electrode device which is used to supply electrical power to an underground deposit thereby to heat the hydrocarbons present in the deposit to cause them to have a lower viscosity and higher fluidity in order to more easily remove them from the well.

The term "hydrocarbons" as used hereinafter means petroleum or oil, bitumen contained in oil sand (also called "tar sand") and kerogen contained in oil shale. These will all be referred to as "oil" for simplicity.

If the oil in the underground deposit has sufficient fluidity, it is possible to extract the oil through the well either by gas pressure coexisting in the oil layer or by forcing a liquid such as brine into one well to force the oil to flow out of another well. However, should the underground oil have low fluidity, it cannot be extracted until the oil is made more fluid. A general method of making the oil fluid is to heat the oil thereby to lower the viscosity of the oil. The temperature suitable for this is different for different types of oil.

There have been proposed as oil layer heating methods

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158

1168283

the injection of hot water or water vapors at a high temperature under a high pressure, supplying electrical power to the underground deposit, underground combustion in which the underground oil layer is ignited with a supply of air so that it may
5 be burned, and the use of explosives. The last two methods are difficult to control so that they are not in general use.

According to the method of injecting the hot water or water vapor at a high temperature and under a high pressure, the oil layer is heated to enhance the fluidity of the oil to
10 cause the fluid oil to flow out to the ground surface. If, however, some regions of the oil deposit have a low resistance to the flow of hot water or water vapors or there are voids in the oil layer, the water or vapors may collect in these regions and fail to diffuse throughout the whole layer. Moreover, if the
15 oil layer is solid and dense, the hot water or its vapors will again not diffuse so that the oil layer cannot be heated.

Heating by the supply of electrical power is performed by drilling a plurality of wells in the oil layer and by establishing potential differences between electrodes disposed in the
20 wells so that the oil layer is heated by its resistance to the electrical current which flows therethrough. This technique is advantageous in that the oil layer can be wholly heated with ease even if it has voids or is solid and dense. However, another device is required for pumping up the fluid oil.

25 For improving the oil producing efficiency, there has

further been proposed a method which includes a first step of heating the oil layer by electrical resistance heating and a step of injecting hot water or water vapors at a high temperature and under a high pressure when the oil layer becomes soft while continuing the heating so that the resultant fluid oil may be pumped out. In order to efficiently heat the oil layer, the electrode device must be sufficiently electrically insulated that the leakage of electrically current into underground portions other than the oil layer is avoided as much as possible. The electrode device is also required to be unbreakable with respect to the underground soil pressure, the pressure of the vapors which are generated by the heating operation, and the pressure of injected hot water or hot high pressure water vapors. The electrode device is further required to be free from leakage of hot water or hot high pressure water vapors.

In order to explain, the electrode device of this general type more fully, an example in which the oil is extracted from oil sand will be described.

Oil sand, also called "tar sand", is present in large quantities in Canada, Venezuela and the United States. The oil in the oil sand is typically mixed with brine between sands in deposits. Moreover, it typically has such a remarkably high viscosity that it has essentially no fluidity in its natural state. A deposit of the oil sand may be partially exposed in a valley or at the banks of

1168283

1 a river but is most often located entirely underground at a depth of 200 to 500 m while having a thickness of several tens of meters. Due to consideration of economy and environmental protection, it is necessary to separate out the oil underground and to extract only the oil from the well. Moreover, since the extraction of oil from a shallow underground layer is accompanied by a danger of subsidence, it is desirable to extract oil only from underground layers lying deeper than 300 m.

Further aspects of the background of the invention and
10 the invention of the present application are described with the assistance of the accompanying drawings in which:

Fig. 1 is a schematic sectional view showing a conventional prior art installation of the general type with which the invention is utilized;

Fig. 2 is a cross-sectional view of an insulated pipe joint of the invention;

Fig. 3 is a cross-sectional view showing several joined pipe sections, an electrode and insulated pipe joints in accordance with the invention; and

20 Figs. 4-7 are a series of cross-sectional views illustrating the use of insulating coatings in accordance with the invention.

Fig. 1 illustrates the heating of an oil sand layer by electrodes coupled to a power supply. In Fig. 1, reference numerals 1 and 11 indicate main guide pipes made of steel, 2 and 12 indicate insulators joined to the main guide pipes 1 and 11, 3 and 13 indicate electrodes joined to the insulators 2 and 12, perforations are formed in the electrodes 3 and 13, and 4 and 14 indicate cables for feeding an electric current to the electrodes 3 and 13. This assembly is hereinafter called together the
30

1168283

1 "electrode device". Reference numeral 5 indicates a power source, 6 indicates an oil sand layer, 7 indicates an electric current flowing between the electrodes 3 and 13, 8 indicates the ground surface, 9 indicates an overburden layer, and 10 indicates a layer below the oil sand layer.

When a voltage is applied to the electrodes 3 and 13 which are buried in the oil sand layer 6 from the power source 5 through the cables 4 and 14, the current 7 flows in accordance with the electric resistance of the oil sand layer 6 as a result

10

20

30

1168283

of which the oil sand layer 6 is heated by Joule or resistance heating. Although, the current 7 partially flows into the overburden layer 9 and the layer 10, the leakage is maintained at a low level because the insulators 2 and 12 are interposed between
5 the main guide pipes 1 and 11 and the electrodes 3 and 13. After the oil sand layer 6 has been warmed, the power supply is interrupted. Hot water or water vapors at a high temperature under a high pressure are then forced from the upper inlet of one main guide pipe 1 of the electrode device and flow through the oil
10 sand layer 6 until they come out of the other main guide pipe 11 carrying the oil. In order to improve the flow rates of the hot water or the hot pressure water vapors, perforations are formed in the electrodes 3 and 13.

Since the upper portions of the insulators 2 and 12
15 are connected to the main guide pipes 1 and 11 and the lower portions are connected with the electrodes 3 and 13, a downward tensile stress is always applied to the insulators. Moreover, since the assembly can be at a temperature as high as 250°C to 300°C, the insulators should be able to withstand such
20 temperatures. Also, since the insulators 2 and 12 are buried underground as deep as several hundred meters with the electrodes 3 and 13 suspended from their lower ends with the upper ends thereof connected to the main guide pipes 1 and 11, the insulators 2 and 12 will almost certainly contact or collide with the well
25 walls while they are lowered into the well. Because of the

1168283

great total weight, any slight contact will impose a high mechanical impact upon the insulators 2 and 12. Therefore, the insulators 2 and 12 are required to be able to withstand anticipated levels of mechanical impact.

5 In an electrode device which heats an oil sand layer when it is supplied with an electric current, a major problem is that the electric resistance in the oil sand layer is approximately equal to the overburden layer. Since these electric resistances differ depending on place and conditions, they cannot generally
10 be precisely stated. However, average values are 100Ω-m for the oil sand layer and 100-150Ω-m for the overburden layer. As a result, if an electric current is supplied to two electrode devices which are constructed by connecting electrodes to guide pipes made of steel pipes and by disposing those electrodes in the oil sand
15 layer, most of the current will be consumed in the overburden layer. In order to avoid this problem, it is necessary either to cover the surfaces of the guide pipes with an insulating coating or to insulate the electrodes from the guide pipes.

 Various attempts have been made to provide insulators
20 which satisfy the aforementioned requirements. In one such attempt, flanged tubular members made of metal are coated with an organic resin which provides a high resistance to heat. An appropriate material is polytetrafluoroethylene resin (for example "TeflonTM" which is trade name of du Pont). With this
25 construction, insulating members are provided which are satisfactory in their ability to withstand a suspending load

1168283

and mechanical impact forces. However, it has proved quite difficult to coat the flange portions satisfactory with the insulating material. Moreover, even if satisfactory insulating characteristics are provided at room temperature, the insulating coating has a tendency to separate, especially around the flange portions, due to repeated thermal expansion and contraction such as is typically encountered in normal operating conditions. If the insulation coating is broken or caused to flake off, the insulators thus produced become useless.

In a second attempt, porcelain material has been used for forming the insulators. However, it is also necessary in constructing the insulators to take into account the requirement for providing water and oil tight characteristics with respect to the connection between the main guide pipes 1 and 11 and the electrodes 3 and 13 as well as between the insulating member. The connection has generally been made by shrink fitting metal pipes on the outer peripheral surface of the porcelain pipe and then connected with other metal pipes ordinary techniques such as welding or attachment with bolts. With this construction, although the water and oil tight characteristics may be acceptable at room temperature, the strength of the shrink-fitted joints tends to drop as the temperature is increased so that the ability to support the suspended load is correspondingly lowered. Moreover, breakage of the porcelain may take place as a result of the stress imposed upon the leading end portions of the shrink-

1168283

fitted areas. In order to eliminate such drawbacks, there has been proposed the use of a porcelain pipe having ends formed as flange portions with the flange portions fastened to metal pipes with packings interposed between the contact surfaces.

5 With this construction, the above-stated requirements are met at room temperature. However, the water and oil tight sealing tends to deteriorate upon repeated thermal expansion and contraction. Moreover, porcelain intrinsically lacks strength against mechanical impact forces. Thus, it has a high tendency
10 to be broken by a mechanical impact force such as is ordinarily encountered while the assembly is lowered through the well. Thus, the provision of a porcelain insulator suffers from the unavoidable defect that there is a high tendency of breakage.

Yet further, insulators formed of organic polymeric
15 compounds have been proposed. Although such compounds may have a high strength at room temperature and are quite good electrical insulators, most of the compounds of this general class are not particularly heat resistant. Specifically, very few compounds of this type are known which are resistant to hot water or water vapor at high temperature and under high pressure.

SUMMARY OF THE INVENTION

In accordance with the invention, there is provided an electrode device for electrically heating underground deposits of hydrocarbons including a plurality of well pipe sections, an electrode adapted to be disposed in an underground deposit of hydrocarbons for supplying an electric current to the underground deposits, a plurality of insulating pipe joints each including a first tubular member having a flange portion at one end thereof, a second tubular member having a cap portion at one end thereof adapted to be received in the flange portion of the first tubular member with a gap therebetween and an insulating member disposed in the gap between the flange portion and the cap portion for hermetically coupling the first and second tubular members while electrically insulating them from one another and with the insulating pipe joints being used to couple at least some of the pipe sections together and the electrode to one of the pipe sections, and a cable connected to the electrode for supplying an electric current thereto.

At least some of the insulating pipe joints can be interconnected. The insulating member of each of the insulated pipe joints includes a first insulating portion disposed in the gap between the flange portion in the cap portion and second insulating portions disposed adjacent inner and outer surfaces of the tubular members with the first and second insulating portions being formed integrally with each other. Preferably, the

1168283

1 insulating member of each of the insulated pipe joints is made of a glass-mica molding formed from powders of glass and mica. An insulating coating may be provided on at least a portion of the outer surface of the insulated pipe joints. This coating may be a resin of polytetrafluoroethylene, a resin of diphenyl oxide. Moreover, a protective layer of insulation can be provided around at least a portion of the insulating coating. The protective layer may be an inexpensive material such as polyethylene, polypropylene or polyvinyl chloride.

10 Further objects and advantages of the invention will appear from the following description taken together with the accompanied drawings.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

In accordance with the invention, there is provided an electrical heating electrode device which is entirely free of the above-mentioned drawbacks. A preferred embodiment of the electrode device of the invention will be described in detail, first with reference to Fig. 2 which shows a cross-sectional view of an insulated pipe joint 21 which is utilized with the
20 electrode device of the invention.

The pipe joint generally designated 21 in Figure 2 comprises four basic elements:

a first tubular member 22, a second tubular member 33, a cylindrical sleeve-like cover member 29, and an insulating member 35.

The first tubular member 22 comprises a cylindrical tubular portion 23 with a radially outwardly extending flange portion 24 at a lower end as shown.

The second tubular member 33 comprises a cylindrical
30 tubular portion 30 with a radially outwardly extending hub portion

1168283

1 25 at an upper end as shown. The interior diameter of tubular portion 30 of the second tubular member 33 is shown identical to the interior diameter of tubular portion 23 of the first tubular member 22.

Hub portion 25 of the 2nd tubular member 33 is provided with an internal annular recess 31 as shown. Hub portion 25 is also provided with external threads 32 which mate with threads 28 on cover member 29 to be described.

10 Sleeve-like cover member 29 comprises a cylindrical, tubular, drum-like portion 26 with internal threads 28 at one lower end as shown in Figure 2 and a radially inwardly extending cap portion 27 at the other upper end. As shown, tubular portion 26 has a larger internal diameter than the external diameter of flange portion 24 of the first tubular member 22 so as to provide a gap therebetween to be occupied by insulating member 35. Cap portion 27 of cover member 29 has an internal diameter larger than the external diameter of tubular portion 23 of the first tubular member 22 so as to form a gap therebetween. The internal diameter of cap portion 27 is smaller than the external
20 diameter of flange portion 24 of the first tubular member 22.

Preferably the first tubular member 22, second tubular member 33 and cover member 29 are made from steel.

Insulating member 35 includes an outer circumferentially insulating portion 36 which surrounds external surfaces of tubular portion 23 of first tubular member 22 and an inner circumferentially insulating portion 37 which fits inside the internal annular recess 31 of hub portion 25 of the second tubular member 33. The inner insulating portion 37 has the same internal diameter as that of tubular portion 30 of the second tubular member
30 33. As may be seen, insulating member 35 comprises an integral

1168283

member extending from portion 36 thereof to portion 37 thereof. Integral insulating member 35 thus spaces surfaces of the first tubular member 22 from surfaces of second tubular member 33 and cover member 29 by a gap occupied as seen in Figure 2 by insulating member 35. Insulating member 35 insulates first tubular member 22 from contact with second tubular member 33 and cover member 29.

With cover member 29 screwed down onto second tubular member 33 as shown in Figure 2, flange portion 24 of first tubular member as encased by insulating member 35 is sandwiched between
10 cover member 29 and the upper end of hub portion 25 of the second tubular member 33, whereby insulating member 35 may form a hermetic seal between first tubular member 22 and second tubular member 33.

By screwing cover member 29 onto second tubular member 33, first tubular member 22 may be firmly, sealably coupled to second tubular member 33 yet insulatively isolated therefrom.

In assembly, first tubular portion 22 may be inserted through cover member 29 following which cover member 29 may be
20 screwed onto second tubular portion 33. The insulating member 35 may be seen to occupy a gap between the first tubular member 22 and the combination of the second tubular member 33 and cover member 29.

Preferably, the entire insulating member is made of a composition of glass and mica and is formed by a molding process. The insulating member is formed by heating a mixture of powders of glass and mica to a sufficiently high temperature that the mixture becomes fluid. Once the mixture is fluid, it is pressure molded using a mold of appropriate shape. The for-
30 mation of the insulating member 35 will be described in more detail.

1168283

1 The first tubular member 22 and the second tubular member 33 are assembled to be positioned as shown in Fig. 2 and are then heated to a predetermined temperature. The two tubular members at the elevated temperature are fitted into a mold. Next, a mixture of glass and mica powders is prepared by pre-molding the mixture into the form of a preliminary molded member of a cylindrical shape which will fit in the gap between the tubular portion 23 of the first tubular member 22 and cover member 29. The preliminary molded member is heated to a predetermined
10 temperature and fitted in the gap in a heated condition. Next, a pressure is applied to the preliminary molded member before it cools to force the material of the member to flow into the gap between the first and second tubular members and into the internal annular recess 31 in the second tubular member 33.

 For the material of the preliminary molded member, 45 wt% of glass powder prepared by pulverizing a glaze used for enamel coating steel objects, commercially available as Product No. 2312 of Nippon Ferro, Ltd., to a size of 200 mesh mixed with
20 55 wt% of mica powder of synthetic phlogopite of a size of 60 to 200 mesh. 5 wt% of water is added to the resultant mixture to wet it so it can be molded. 1500 gm of the wetted mixture is molded using a cold pressure molding process to form a cylindrically shaped body using a mold (not shown). The preliminary molded member was disposed in a drier at 120°C for two hours to dry it prior to its use in forming the insulating member 35.

 As described above, the cover member 29 and the hub portion 25 are joined by screw threads. However, the invention is not limited thereto as the cover member 29 and the hub portion 25 can be joined by welding.

30 In an alternate embodiment, the cap portion 27 of

1168283

1 the cover member 29 is divided into four quadrants two of which are removed. The flange portion 24 of the first tubular member 22 is then cut such that the remaining part of the flange portion 24 can fit through the two removed quadrants of the cap portion 27 so that the flange portion 24 can be located under the cap portion 27 of the cover member 29.

With the insulated pipe joint described above, a tensile force imposed on the ends of the joint is converted into a compressive force which acts between the cap portion 27 and
10 flange portion 24. Since the compression strength of the insulating member 35 of the type described is much greater than its tensile strength and since the force per unit area can be suitably set by adjusting the extent of the area on which the compressive forces are applied, the resulting assembly is quite strong and able to withstand high tensile forces imposed on the ends of the joint.

At high temperatures, for instance 300°C , the heat resistant characteristics of the insulating member are primarily determined by the thermal characteristics of the glass material
20 used as the starting material. Particularly, the transition temperature of this material is important. If the transition

temperature is, for instance, in a range of 550 °C to 600 °C. a high mechanical strength for the overall assembly will be preserved to a temperature of at least 300°C.

With respect to the resistance to mechanical impact forces, the mica powder which is used to form the insulating member is composed of particles having a flat shape wherein the ratio of the diameter to the thickness of a single scale particle is generally in a range of 30 to 50:1. Due to the presence of the scale particles, the molded insulating member has a laminated form thereby providing it with a high elasticity. This high elasticity would not be present if the insulating member were formed only of glass powders. Due to the laminated construction, the insulating member is provided with a much greater resistance to repeated temperature changes and mechanical impact forces than is a prior art type of insulating member made of an inorganic compound. Therefore, the insulating member produced in accordance with the invention is sufficiently strong that it can withstand the typical impact forces which are encountered during the use of the structure.

Next, the construction of a preferred embodiment of an electrode device of the invention utilizing the above-described insulated pipe joint 21 will be given with reference to Fig. 3. Reference numerals 1 to 4 used in Fig. 3 indicate similar components as those of Fig. 1. The righthand half of Fig. 3 shows the completed structure of the insulated pipe joint

1168283

21. As shown in the figure, the insulating member 2 includes two insulated pipe joints 21. One end of the insulating member 2 is connected to the pipe 1 and the other to the electrode 3. These connections may be made by well-known techniques such as welding or by the use of screw threads.

As, in accordance with the invention, the completed insulated pipe joint 21 has a common throughhole of constant internal diameter, the assembly and use thereof is quite easy. For instance, the provision of the above-described partitions is quite simple. Of course, more than two insulated pipe joints 21 can be provided as needed. Also, one of the pipe joints 21 can be connected directly to the pipe 1.

If needed, such as in the case brine having a high salt concentration is used, the outer surface of the insulated pipe joint 21 can be covered with a coating 41 of an organic substance having a sufficiently high heat resistant property. This is shown in the left-hand part of Fig. 3. For example, the coating 41 can be formed by shrink fitting a "TeflonTM" tube.

As described above, in accordance with the invention, the pipes and the electrodes are connected through the insulated pipe joints. Tensile forces applied at the ends of the insulated pipe joints are converted into compression forces which act between the cap portions and the flange portions thereof. Since the compression strength of the insulating member is much greater than the tensile strength thereof, the overall electrode device

1168283

of the invention has a quite high mechanical strength and can withstand high pressures and strong mechanical impact forces so that it can be used under severe operating conditions often encountered in oil well application.

5 Yet further, the coating 41 and the insulating members
2 and 12 of the electrode can be formed from other materials.
To determine what materials are best for these members, tests
were conducted to investigate the resistance of various organic
polymeric compounds to hot water and water vapor at high temperature
10 and under high pressure. The compounds investigated are listed in
Table 1 herein.

 Regarding the tests, test pieces of each of the materials
were placed in quartz test tubes filled with pure water. These
test tubes were placed in a 2-liter autoclave containing pure
15 water. The autoclave was held at 280°C at an internal pressure
of 68 kg/cm² for a period of 10 days. The autoclave was then
cooled to a room temperature and the test pieces were checked for
appearance. The results are presented in Table 2 from which it
can be seen that hot water and steam had a much more adverse affect
20 than dry heat. Of the materials tested, only polytetrafluoroethylene
resin and diphenyl oxide resin were acceptable.

 A coating of water and steam resistant resin can be
formed around the pipe 1 by repeatedly applying coatings of the
material and baking the assembly until the desired thickness is

obtained. Also, a coating of the heat resistant resin can be formed by first preparing a tube of the resin having an inside diameter slightly larger than the outside diameter of the pipe 1 and then slipping the tube over the pipe 1. If the resin is in the form of a sheet or tape, it may be wound directly around the pipe 1 and then fusion-bonded if necessary. As described above, a heat-shrinkable tube of polytetrafluoroethylene can be slipped over the pipe 1 and heated to fit it tightly to the pipe.

As discussed above, when the assembly including the electrode is inserted into the oil well, there is unavoidable contact with the inner wall of the well so that the heat resistant insulating coating may be damaged. To prevent this, protective coating of insulation 16 may be formed around the insulation 15 as shown in Fig. 5. Since the protective coating of insulation 16 may melt or collapse if the electrode is exposed to high temperatures, it can be made of an inexpensive material such as polyethylene, polypropylene or polyvinyl chloride.

Typically, the total length of the guide pipe 1 is 200 to 500 m. However, a single section of the steel pipe that makes up the guide pipe 1 is only about 10 m in length. To join the pipe sections, each pipe section is provided with a taper thread on one end and the pipe sections are joined by screwing them together. An insulating coating must also be formed around the joined parts of the pipe sections and on the surface of the coupling. To accomplish this, as shown in Fig. 6, steel pipes

1168283

1A and 1B are covered with the coating of heat resistant insulating material 15A and 15B and are joined by a coupling 17. A coating of heat resistant insulation 15C is formed around the coupling extending into adjacent areas. A heat-shrinkable tube
5 of a polytetrafluoroethylene is particularly suitable in this case.

To protect the insulating coatings from direct contact with the inner wall of the well, steel pipe sections 1A and 1B covered with the coating of heat resistant insulating material
10 15A and 15B and protective coatings of insulation 16A and 16B are first joined through the coupling 17. Thereafter, the coupling 16 is coated with the heat resistant insulation 15C and then a layer of 16C is formed around the coupling and in the adjacent areas as shown in Fig. 7.

1168283

1A and 1B are covered with the coating of heat resistant insulating material 15A and 15B and are joined by a coupling 17. A coating of heat resistant insulation 15C is formed around the coupling extending into adjacent areas. A heat-shrinkable tube
5 of a polytetrafluoroethylene is particularly suitable in this case.

To protect the insulating coatings from direct contact with the inner wall of the well, steel pipe sections 1A and 1B covered with the coating of heat resistant insulating material
10 15A and 15B and protective coatings of insulation 16A and 16B are first joined through the coupling 17. Thereafter, the coupling 16 is coated with the heat resistant insulation 15C and then a layer of 16C is formed around the coupling and in the adjacent areas as shown in Fig. 7.

1168283

Table 1						
Sample	Chemical name (abbr.)	Manufacturer	Item No.	Form	Thickness	Method of sample preparation
A	Polytetrafluoroethylene resin (PTFE)	Nitto Electric Industrial Co., Ltd.	No. 900	Tape	0.1	Cutting
B	Tetrafluoroethylene-hexafluoropropylene copolymer resin (FEP)	"	No. 945	Tape	0.125	"
C	Tetrafluoroethylene-perfluoroalkylvinyl ether copolymer resin (PFA)	"	No. 460	Tape	0.125	"
D	Polyimide resin	Toray Industries, Inc.	Kapton	Film	0.05	"
E1	Diphenyl oxide resin	Kyodon Chemical Industries Co., Ltd.	V505-50	Liquid	0.05	Baking after application to tinplate
E2	" + mica powder (20 wt%)					
F	Diphenyl oxide resin - laminated with glass cloth	"	PGD-637	Sheet	2 mm	Cutting

<u>Sample</u>	<u>Chemical name (abbr.)</u>	<u>Manufacturer</u>	<u>Item No.</u>	<u>Form</u>	<u>Thickness</u>	<u>Method of sample preparation</u>
G	Silicone resin	Shinetsu Chemical Industry Co., Ltd.	KR-280	Liquid	0.05	Baking after application to tinplate
H	Silicone resin-laminated with glass cloth	Nikko Kagaku K.K.	NL-SG-13	Sheet	3 mm	Cutting
I	Epoxy resin-laminated with glass cloth	"	NL-EG-23	Sheet	3 mm	Cutting
J	Unsaturated polyester resin-laminated with glass cloth	"	NL-POGN	Sheet	3 mm	Cutting

1168283

1168283

Table 2

<u>Sample</u>	<u>Appearance</u>
A	OK.
B	Turned into a lump.
C	Do.
D	Collapsed
E1	OK.
E2	Do.
F	Do.
G	Turned into a lump.
H	Glass whitened (Resin came apart)
I	Do.
J	Do.

1168283

WHAT IS CLAIMED IS:

1. An electrode device for electrically heating underground deposits of hydrocarbons comprising: a plurality of well pipe sections; an electrode adapted to be disposed in an underground deposit of hydrocarbons for supplying an electric current to said underground deposit; a plurality of insulated pipe joints each including a first tubular member having a flange portion at one end thereof, a second tubular member having a cap portion at one end thereof adapted to be received in said flange portion of said first tubular member with a gap therebetween, and an
5 insulating member disposed in said gap between said flange portion and said cap portion for hermetically coupling said first and second tubular member and for electrically insulating said first and second tubular members from one another, said insulated pipe joints being operatively disposed to couple at least some
10 of said pipe sections and said electrode while electrically insulating said at least some of said pipe sections and said electrode; and a cable connected to said electrode for supplying an electric current to said electrode.
2. The electrode device as set forth in claim 1 wherein at least some of said insulated pipe joints are interconnected.
3. The electrode device as set forth in claim 1 wherein said insulating member of each of said insulated pipe joints comprises a first insulating portion disposed in said gap between said flange portion and said cap portion, and second insulating

1168283

portions disposed adjacent inner and outer surfaces of said tubular members, said first and second insulating portions being formed integrally with each other.

4. The electrode device as set forth in claim 1 wherein
5 said insulating member of each of said insulated pipe joints is made of a glass-mica molding formed from glass and mica powders.

5. The electrode device as set forth in claim 1 further
10 comprising an insulating coating provided on at least a portion of an outer surface of said insulated pipe joints.

6. The electrode device as set forth in claim 5 wherein said insulating coating is polytetrafluoroethylene.

7. The electrode device as set forth in claim 6 wherein
15 said insulating coating comprises a resin of thermally shrinkable polytetrafluoroethylene.

8. The electrode device as set forth in claim 5 wherein said insulating coating comprises a resin of diphenyl oxide.

9. The electrode device as set forth in any of claims 5-7
20 further comprising a protective layer of insulation upon at least a portion of said insulating coating.

10. The electrode device as set forth in any of claims 5-7
further comprising a protective layer of insulation upon at least a portion of said insulating coating, said layer of protective insulation comprising a material selected from the
25 group consisting of polyethylene, polypropylene and polyvinyl chloride.

1168283

11. An electrode device for electrically heating underground deposits of hydrocarbons comprising a plurality of interconnected well pipe sections, an electrode adapted to be disposed in an underground deposit of hydrocarbons supplying electric current to said underground deposit, at least one insulated pipe joint including a first tubular member comprised of a well pipe section having a flange portion at one end thereof, a second tubular member comprised of said electrode disposed in alignment with said first tubular member, a cover member carried by said second tubular member having a cap portion at one end thereof disposed in overlying relation to said flange portion above said first tubular member with a gap therebetween, an insulating member disposed in said gap between said flange portion and said cap portion for hermetically coupling said first and second tubular member and for electrically insulating said first and second tubular members from one another, cable means connected to said electrode for supplying an electric current to said electrode and an insulating coating provided on at least an outer surface of said insulating pipe joint.

